


TAZETTA LED

Our best-selling fluorescent shelf light is now available in a re-imagined, energy-smart fixture. Loaded with improvements, the new eco-friendly Tazetta LED performs brilliantly using almost half the wattage of its former model but still features the same slim profile, daisy-chaining capability, and finish varieties so popular in the original.

FEATURES

- Vastly improved power consumption
- Exceptionally long life
- New magnet mounting option
- New high output option
- Mercury-free

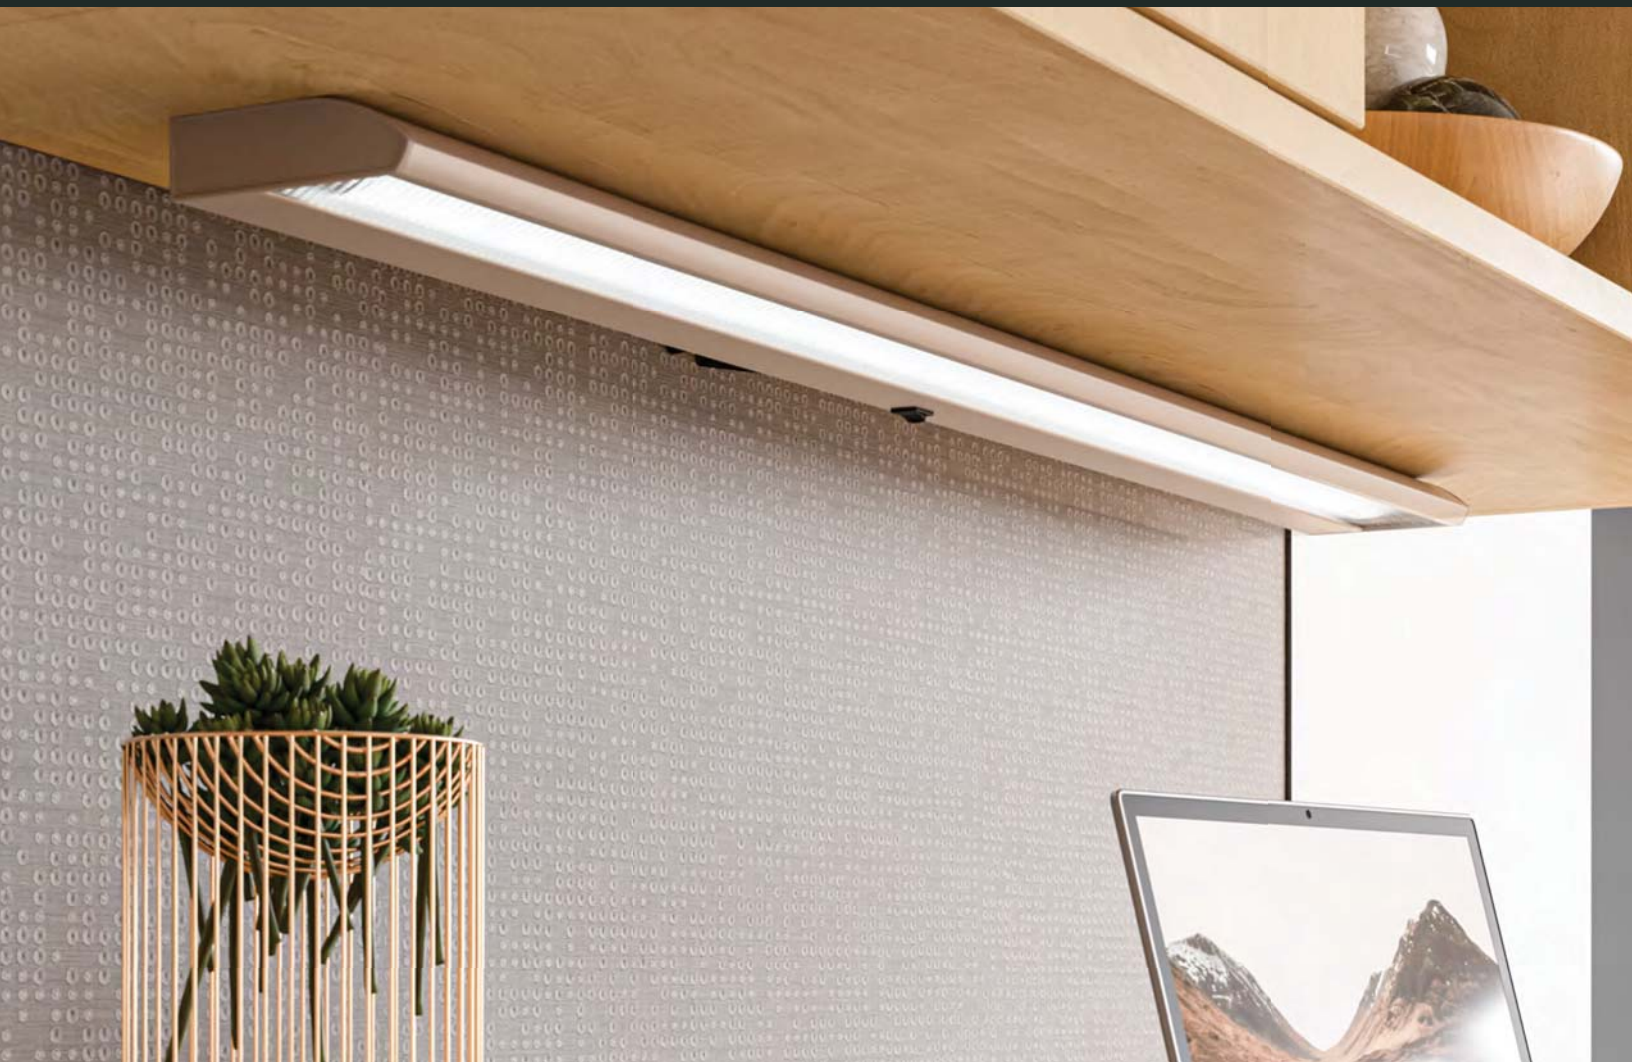

TAZETTA LED Under Shelf Light

SPECIFICATIONS

LENGTHS:
24", 36", 48"

ENERGY CONSUMPTION:
see chart below

LAMP:
T5 LED tube

LIGHT OUTPUT:
see chart below

PEAK FOOTCANDLES:
see charts next page

LED RATED LIFESPAN:
> 50,000 hours

COLOR TEMPERATURE:
3500K; 4000K also available

COLOR RENDERING INDEX:
82+

LENS:
prismatic; batwing also available

REFLECTOR:
UV stable silver reflector

CORD COLOR:
9' black; SW plug; exit center


MATERIAL:
powder coated steel and plastic

MOUNTING:
screw mount, magnet mount, or spring bar mount

CERTIFICATIONS:
ETL listed: compliant to UL 153 & CSA C22.2 No. 250.4; TAA

WARRANTY:
5 years

DIMENSIONS

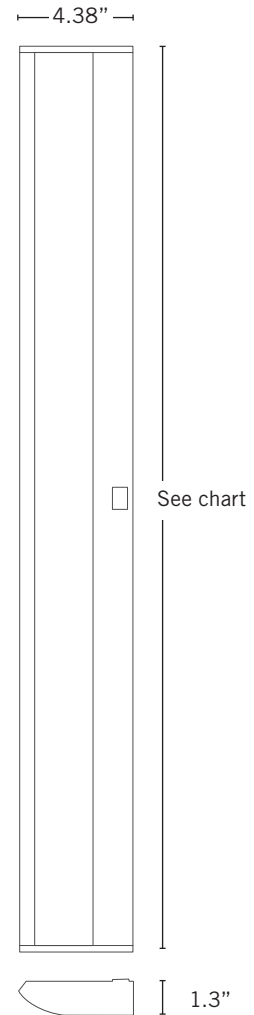

	LUMENS		WATTAGE		LUMENS/WATT		ACTUAL LENGTH	SUGGESTED SHELF SIZE
	SO	HO*	SO	HO	SO	HO*		
24"	589	802	8.7	12.0	67.9	69.6	23.3"	30" – 36"
36"	776	1034	11.6	15.7	66.6	66.6	35.1"	42" – 48"
48"	784	1666	13.6	24.0	58.4	64.6	46.9"	54" – 60"

* estimated values

FINISHES

WHITE	GRAY	METALLIC SILVER
SOFT WHITE	PEWTER	METALLIC CHAMPAGNE
SILVER STAR	CHARCOAL	METALLIC DK. CHAMPAGNE
SAND	BLACK	

TAZETTA LED Under Shelf Light

PHOTOMETRIC DATA

Footcandle outputs for the 3500K tube, measured at 18" from the work surface.

Standard output 24" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	11	16	23	27	25	19	12
6"	17	31	45	53	50	37	22
CL	25	45	69	83	78	57	34
6"	29	54	83	101	96	71	40
12"	43	46	66	82	76	56	32

High output 24" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	11	18	24	29	27	21	14
6"	19	33	48	57	54	40	25
CL	28	51	77	92	86	64	38
6"	33	63	96	117	111	81	46
12"	27	50	74	90	84	60	35

Standard output 36" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	13	18	23	26	25	21	16
6"	24	36	46	52	51	43	30
CL	37	59	78	87	83	67	48
6"	45	72	97	109	105	86	59
12"	37	58	75	84	82	68	47

High output 36" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	15	22	26	29	28	24	18
6"	29	43	55	60	57	47	34
CL	47	74	97	106	100	81	56
6"	57	94	123	137	129	104	70
12"	45	72	93	103	98	79	54


Standard output 48" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	14	18	20	22	22	20	17
6"	26	36	41	43	43	39	35
CL	43	60	71	76	74	67	55
6"	54	77	91	97	95	87	70
12"	40	57	68	73	71	65	52

High output 48" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	30	41	48	51	50	47	38
6"	60	84	99	106	103	95	75
CL	98	140	168	180	175	158	125
6"	116	169	202	215	211	191	153
12"	84	120	144	154	150	136	109

ACCESSORIES

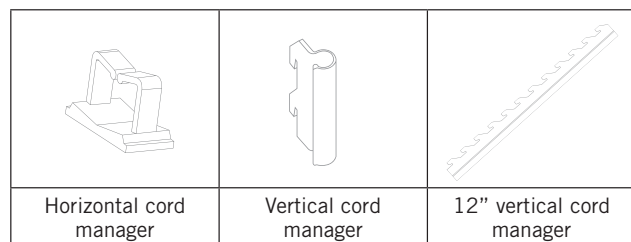

SUSTAINABILITY NOTES

- Made with fully-recyclable steel and plastic. Please contact your local county or municipality to determine your local recycling options.
- High efficiency lens
- Lower power consumption
- Mercury-free
- Potential LEED points. For more LEED information please visit <https://new.usgbc.org/leed-v41>